


# CRISAL AL

## INDUSTRIAL MAINTENANCE

Air/Compressed air applications

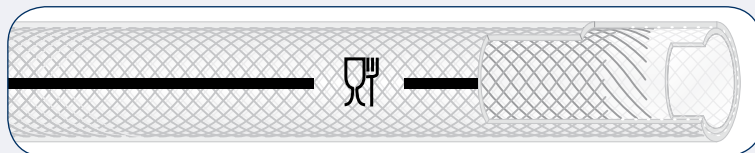

### Applications

Air hose also suitable for discharge of water and liquid foodstuffs.

### Advantages

- Light, flexible, multipurpose hose (see separate chemical resistance table).
- Comprehensive range of diameters.

### Technical description

**Inner tube:** PVC, transparent, smooth.

**Reinforcement:** synthetic textile, yarns.

**Cover:** PVC, transparent, smooth.

**Temperature range:** - 15 °C to + 60 °C.

**Standard/Approval:** french food discharge standard (IANESCO of Poitiers).

### Complementary information

Working pressure and bursting pressure mentioned are valid at + 20 °C.

## CRISAL AL

19/02/2007

ID		Wall thickness	OD		Working pressure	Bursting pressure	Bending radius	Weight	Length	Article number	Stock (■) or min. order
mm	±	mm	mm	±	bar	bar	mm	kg/m	m		m
4.0	± 0.5	3.00	10.0 ± 0.25		15	45	45	0.08	* 4 x 50	0085010	2000
5.0	± 0.5	3.00	11.0 ± 0.25		15	45	50	0.09	* 4 x 50	0070648	2000
6.0	± 0.5	3.00	12.0 ± 0.25		15	45	55	0.10	* 8 x 25	0202564	■
									* 4 x 50	0202565	■
8.0	± 0.6	3.00	14.0 ± 0.25		15	45	65	0.13	* 6 x 25	0202566	■
									* 3 x 50	0202567	■
9.0	± 0.6	3.00	15.0 ± 0.25		15	45	70	0.14	* 6 x 25	0202568	■
									* 3 x 50	0202569	■
10.0	± 0.6	3.00	16.0 ± 0.25		15	45	75	0.15	* 6 x 25	0202570	■
									* 3 x 50	0202571	■
12.0	± 0.6	3.00	18.0 ± 0.25		15	45	82	0.17	* 4 x 25	0202572	■
									* 2 x 50	0202573	■
13.0	± 0.6	3.50	20.0 ± 0.25		10	30	90	0.22	25	0202574	■
									50	0202575	■
16.0	± 0.8	3.25	22.5 ± 0.25		10	30	100	0.24	25	0202576	■
									50	0202577	■
19.0	± 0.8	4.00	27.0 ± 0.40		6	24	125	0.35	25	0202542	■
									50	0202543	■
25.0	± 1.0	4.50	34.0 ± 0.40		6	18	155	0.51	25	0202544	■
									50	0202545	■
32.0	± 1.0	5.00	42.0 ± 0.50		6	18	190	0.72	25	0202546	■
									50	0202547	■
38.0	± 1.0	5.00	48.0 ± 0.50		6	18	215	0.83	25	0202548	■
50.0	± 1.0	7.00	64.0 ± 0.50		6	18	300	1.55	25	0202549	■

\* hoses delivered in carton boxes

### Branding

