


PARATUB

CHEMICAL PETROCHEMICAL

Chemical and corrosive products/Transfer

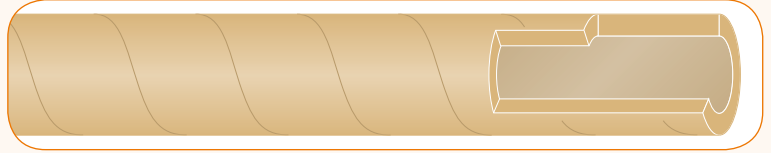

Applications

Discharge under pressure or gravity flow of corrosive products such as acids and alkalis.

Advantages

- Tube can be cut to length as required.
- Flexible and easy to handle.
- Excellent resistance to low temperatures.

Technical description

Inner tube: chemical resistant NR, beige, smooth.

Cover: fabric impression.

Temperature range: - 40 °C to + 70 °C.

Electrical properties: non conductive.

PARATUB

22/03/2007

ID		Wall thickness	OD		Max. pressure	Weight	Length	Article number	Stock (■) or min. order
mm		mm	mm		bar	kg/m	m		m
15.0	-0/+1	5.0	25.0	±1	1	0.34	20	0200387	400
20.0	-0/+1	5.0	30.0	±1	1	0.43	20	0200840	■
							40	0200841	400
25.0	-0/+1	5.0	35.0	±1	1	0.51	20	0200843	■
							40	0200844	400
30.0	-0/+1	5.0	40.0	±1	1	0.59	20	0200846	■
							40	0200847	400
35.0	-0/+1	5.0	45.0	±1	1	0.67	20	0200849	■
							40	0200850	400
40.0	-0/+1	5.0	50.0	±1	1	0.76	20	0200852	■
							40	0200853	400
50.0	-0/+1	5.0	60.0	±1	1	0.92	20	0200855	■
							40	0200856	400
60.0	-0/+1	5.0	70.0	±1	1	1.09	20	0200858	■
							40	0200874	200
80.0	-0/+1	7.5	95.0	±1	1	2.12	20	0200876	■
							40	0200877	200

No branding

