


# KLERIX

## CONSTRUCTION & ENVIRONMENT

Drain and sewer cleaning

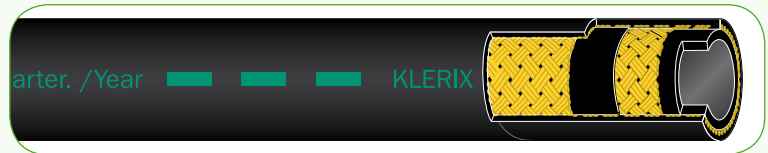

### Applications

For use in sewer cleaning water pressure applications.  
Suitable for replacing hydraulic hoses used in this application.

### Advantages

- Abrasion and weather resistant cover compound.
- Smooth cover, low friction.
- Long lengths.

### Technical description

**Inner tube:** SBR, black, smooth.  
**Reinforcement:** steel, braided.  
**Cover:** SBR, black, smooth.  
**Temperature range:** - 30 °C to + 80 °C.

### Complementary information

Delivered without couplings.

### Couplings/Fittings

Hydraulic coupling.

## KLERIX

17/04/2007

ID		Wall thickness	OD		Working pressure	Bursting pressure	Bending radius	Weight	Length	Article number	Stock (■) or min. order
mm		mm	mm		bar	bar	mm	kg/m	m		m
<b>13.0</b>	± 0.8	5.00	23.0	± 0.8	200	500	70	0.45	40	0071107	■
									50	5500018	■
									60	0071108	■
									80	0071109	■
									100	0071110	■
<b>19.0</b>	± 0.8	6.25	31.5	± 0.8	200	500	95	0.82	120	0071111	■
									40	5010435	2500
									60	0071113	2500
									80	0071114	■
									100	0071115	■
<b>25.0</b>	± 1.0	6.55	38.1	± 1.0	200	500	110	1.14	120	0071116	■
									60	0071117	2000
									80	0071118	■
									100	0071119	■
									120	0071120	■
<b>32.0</b>	± 1.2	6.95	45.9	± 1.2	200	500	150	1.57	60	0071121	1000
									80	0071122	1000
									100	0071123	1000
									120	0071124	1000

### Embossed branding

