

# OS2

## Bunker S & D Hose

**Application:**


- ☞ For suction and pressurising for delivery of liquid mineral oil products (crude oil, diesel oil, etc., but not liquid gas!) with an aromatic content of max. 50%.

**Standard/approval:**

- ☞ EN 1765:2004 S

**Notice:**

- ☞ Steam cleaning at max. 120°C for max. 30 min, unpressurised.
- ☞ Up to max. 6" inside diameter also suitable for overhead use.
- ☞ Available with vulcanised hose nozzles with screw or flange ends (API, ASA, DIN or other) made of CS or SS.

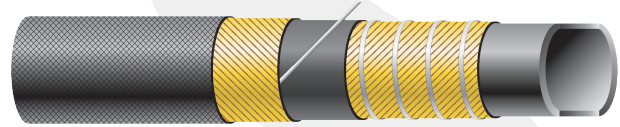

**Temperature range:** -35°C / +80°C.

**Safety factor:** 4 : 1

**Tube:** NBR, black, smooth, oil resistant, antistatic.

**Reinforcement:** Textile wrapped, zinc plated steel wire helix, copper wire.

**Cover:** CR, black, resistant to oil, abrasion, weather and sea water, antistatic, cloth impression.

**Marking:** Continuous transfer tape, silver: "SEMPERIT S" and red embossed label on both sides of the hose "SEMPERIT S OS2 EN 1765 S 15 DN quarter/year PD 23".

Vacuum resistance up to -0.9 bar

weight kg/m = average weight without fittings

Article number	Internal-Ø in		Wall width in mm	External-Ø in mm	Work. pressure (max.) bar	Number of inserts	Bending radius (min.) in mm	Weight approx. kg/m	Coil length (max.) m
	mm	inches							
56140 2100	101,6	4	14,0	129,6	15	4	600	8,20	15,5
56140 2160	152,0	6	14,5	181,0	15	6	900	16,20	15,5
56140 2180	203,2	8	16,0	235,2	15	8	1200	21,50	15,5
56140 2150	254,4	10	16,0	286,4	15	8	1500	29,30	15,5
56140 2170	305,0	12	16,0	337,0	15	8	1800	34,80	15,5

**Please note:** General information about our range of products can be found in the appendix to this catalogue. Before using with new or untested media, or before using in applications that are not covered in the product information, written advice must first be obtained from a specialist dealer or a Semperit application engineer. All products must be inspected regularly for operational safety. For safety reasons, hoses must be replaced in the event of damage, especially if the cover is damaged. All products must be stored and maintained according to our storage, care and maintenance instructions, and according to DIN 7716:1982. We are constantly developing and improving our products for our customers. For the latest product information, please visit our website [www.semperflex.com](http://www.semperflex.com) regularly or contact one of our specialist dealers or Semperit application engineers. Contracts are agreed according to our general terms and conditions. Subject to change without notice.

**Important notice:** This catalogue has been prepared with the greatest care in order to provide you with all the information you need. The information contained herein incorporates the latest state-of-the-art technology, and is the result of trials and tests carried out over many years, or conforms to the resistance requirements of the media listed as set out in ISO TR 7620:2005 (E). The individual conditions of use affect the use of each product. They therefore only ensure the safety that can be expected assuming that the specifications in our written product information, the specifications regarding resistance to chemicals and our cleaning procedures are all complied with. We cannot guarantee this level of safety in the event of improper handling, e.g. squashing, rupturing, stretching or filling with media that are not permitted. Unless specified otherwise, all hoses are manufactured to EN ISO 1307:2006.