


VULPANE EN 559

INDUSTRIAL MAINTENANCE
Welding hose

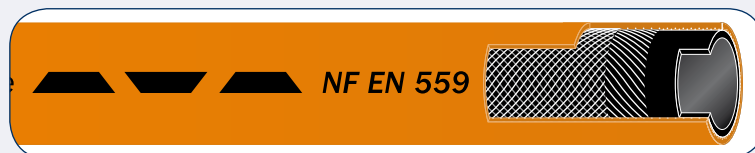

Applications

Rubber hose for LPG (gas cylinders, heaters, welding, and LPG lines).

Advantages

- Flexible and light weight for easy handling.
- Long, safe service life:
 - a hose cover particularly resistant to atmospheric conditions (ozone and hot spots),
 - special, high quality rubber compounds,
 - very strong textile reinforcement giving high safety factor.
- Clear branding showing gas symbol and date of manufacture.

Technical description

Inner tube: NBR/SBR, black, smooth.

Reinforcement: synthetic textile.

Cover: EPDM, orange, smooth.

Temperature range: - 30 °C to + 80 °C.

Standard/Approval: EN 559, ISO 3821.

VULPANE EN 559

05/02/2008

ID	Wall thickness	OD	Working pressure	Bursting pressure	Bending radius	Weight	Length	Article number	Stock (■) or min. order	
mm	mm	mm	bar	bar	mm	kg/m	m		m	
5.0	± 0.4	3.00	11.0 ± 0.5	20	60	50	0.11	40	0070484	5000
6.3	± 0.5	2.85	12.0 ± 0.6	20	60	55	0.12	20	0200010	■
								40	0200009	■
								100	5501202	5000
								120	0200008	■
8.0	± 0.5	3.00	14.0 ± 0.6	20	60	65	0.15	20	0200013	■
								40	0200012	■
								120	0200011	■
9.0	± 0.5	3.00	15.0 ± 0.6	20	60	70	0.18	20	0200551	◇
								40	0200552	■
								120	0200553	■
10.0	± 0.5	3.50	17.0 ± 0.6	20	60	75	1.21	20	0200016	■
								40	0200015	■
								120	0200014	■

Branding

◇ upon availability

NF EN 559 - ISO 3821 - GPL/MPS - DN - 2MPa (20 bar) - 30 °C - CF - Year - Made in France

